

# Clean-Flow™



*Reduces Change Over  
to Minutes.*

**LYCO**  
Manufacturing, Inc.  
*Leaders in Food Processing Innovation*



# LycO Clean-Flow™



## ADVANTAGE-CAPACITY Rotary Blancher Sizing-50 lbs/cubic ft./800 Kg/m<sup>3</sup>

		MINUTES										
		5	6	7	8	9	10	11	12	13	14	15
40"x7"	PPH	5,400	4,500	3,750	3,300	2,950	2,650	2,400	2,100	1,900	1,750	1,650
1Mx2M	KgPH	2,450	2,050	1,700	1,500	1,400	1,200	1,050	950	865	795	750
40"x10"	PPH	7,800	6,500	5,600	4,750	4,250	3,800	3,500	3,300	3,100	2,950	2,850
1Mx3M	KgPH	3,500	2,950	2,550	2,150	1,900	1,700	1,600	1,500	1,410	1,340	1,295
50"x7'	PPH	9,900	8,500	7,350	6,500	5,750	5,150	4,700	4,350	4,150	3,950	3,850
1.5Mx2M	KgPH	4,500	3,850	3,350	2,950	2,600	2,350	2,100	1,975	1,885	1,795	1,750
50"x10'	PPH	14,500	11,500	10,500	9,350	8,250	7,350	6,750	5,750	5,550	5,350	5,150
1.5Mx3M	KgPH	6,575	5,200	4,750	4,250	3,750	3,350	3,050	2,600	2,525	2,450	2,340

### QUICK-CHANGE OVER

Clean-Flow Screen rests in the 3:00-9:00 position for operation, and rotates 360 degrees during the cleaning process, depositing residue in the tank for disposal in mere minutes.




- CIP in 15 min.
- Space Savings
- Higher Recovery (5-15%)

Patent Pending

CIP MANIFOLDS

SCREEN ROTATES AROUND THE AUGER DURING CLEANING

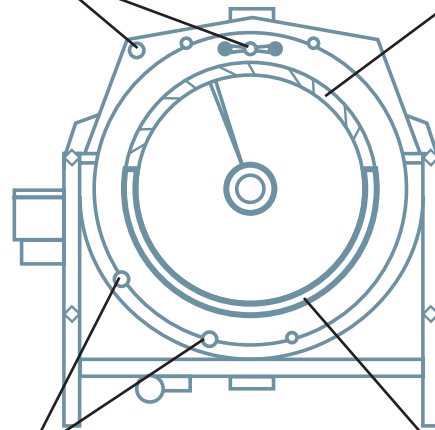

HYDRO-FLOW™ MANIFOLDS

SCREEN OPERATING POSITION AT 3:00-9:00



Holmensvej 38A  
DK-3600 Frederikssund  
Denmark

Tel. +45 70 25 24 20  
Fax +45 70 25 24 21

sales@tegetec.com  
www.tegetec.com



Job No: 2006-3935  
Date: 9/13/06  
Op/Mach#: PG  
Version: Clean-Flow\_back  
SIZE: 8.5" x 11"